




BSM375M-60HPH

355-375W

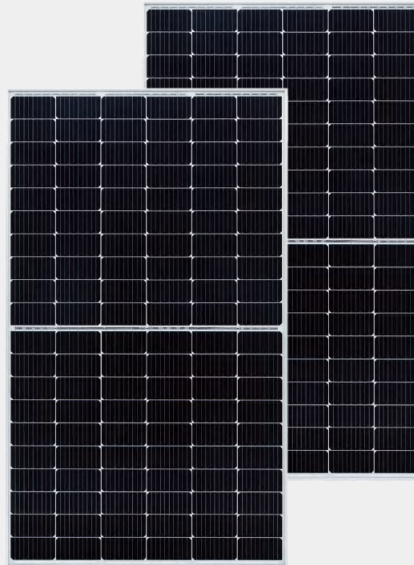

375W Maximum Power Output
20.4% Maximum Module Efficiency
0~+5W Power Output Guarantee

YOUR BEST PV SUPPLIER



Ideal choice for large scale ground installation



More evenly distributed soldering points and better reliability and lower hot spot risk



Selected encapsulating material and stringent production process control ensure the product is highly PID resistant and snail trails free



Lower LID due to lower oxygen and carbon content



Special cell process ensures great performance under low irradiance conditions




Provides higher module efficiency under low irradiance conditions, and achieves greater installation capacity in a limited space.

Key features

- World-class manufacturer of crystalline silicon photovoltaic modules
- Fully automatic facility and world-class technology
- Rigorous quality control to meet the highest standard: ISO9001:2015, ISO14001: 2015 and OHSAS: 18001 2007
- Tested for harsh environments (salt mist, ammonia corrosion and sand blowing test: IEC 61701, IEC 62716, DIN EN 60068-2- 68)
- Long term reliability tests
- 2×100% EL inspection ensuring defect-free modules

Linear Performance Warranty

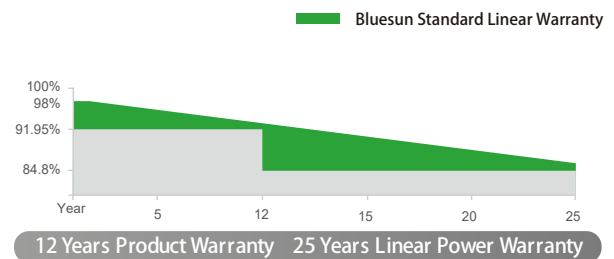

* Please refer to Bluesun standard warranty for details

Certificate



+86-158-5821-3997



info@bluesunpv.com



+86-551-6520-3660



1499 Zhenxing Road, Shushan District, 230031 Hefei, China


www.bluesunpv.com





ELECTRICAL PARAMETERS AT STC


Model	BSM355M-60HPH	BSM360M-60HPH	BSM365M-60HPH	BSM370M-60HPH	BSM375M-60HPH
Max Power(Pmax) [W]	355	360	365	370	375
Open Circuit Voltage(Voc) [V]	40.5	40.7	40.9	41.1	41.3
Short Circuit Current(Isc) [A]	11.10	11.15	11.20	11.26	11.31
Max Power Voltage(Vmp) [V]	34.0	34.3	34.6	34.9	35.2
Max Power Current(Imp) [A]	10.45	10.50	10.56	10.61	10.66
Module Efficiency [%]	19.3	19.6	19.8	20.1	20.4
Power Tolerance	0-5W				
Max System Voltage	DC 1500/1000(IEC)				
Max Series Fuse Rating	20A				
Operating Temperature	-40 °C to +85 °C				
STC	Irradiance 1000W/m ² , cell temperature 25 °C, AM1.5				

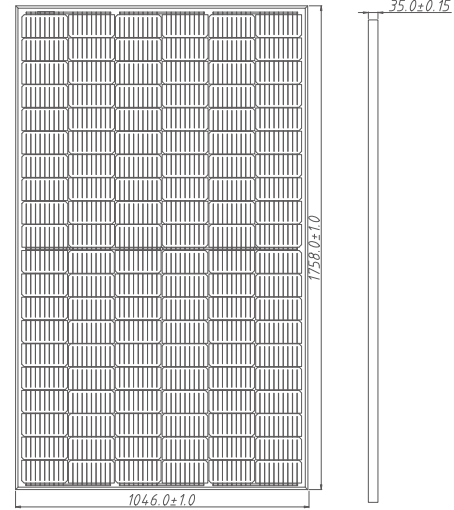

NMOT




Model Number	BSM355M-60HPH	BSM360M-60HPH	BSM365M-60HPH	BSM370M-60HPH	BSM375M-60HPH
Max Power(Pmax) [W]	264.2	267.7	271.2	274.7	278.1
Open Circuit Voltage (Voc)	37.7	37.9	38.0	38.2	38.4
Short Circuit Current (Isc)	8.96	9.00	9.04	9.09	9.13
Maximum Power Voltage (Vmp)	31.4	31.6	31.9	32.1	32.3
Maximum Circuit Current (Imp)	8.43	8.46	8.50	8.55	8.60
NMOT	43±2°C				

*Irradiance 800 W/m², ambient temperature 20 °C, wind speed 1 m

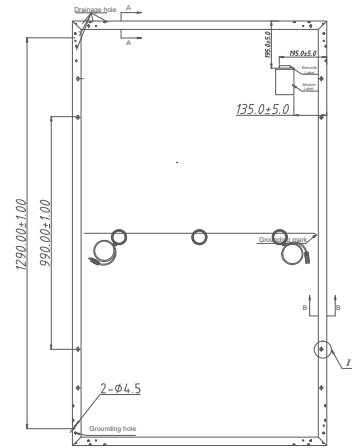

Mechanical Characteristics

Solar Cells	Mono Perc 166×166mm(6inches)
Dimensions	1758*1046*35 (69.21*41.18*1.38inches)
Weight	21kg (46.3lbs)
Front Load	5400Pa
Connector Type	PV Connector
Junction Box	IP68,3/6 bypass diode
Cables	4mm ² (IEC)
Glass	3.2mm High Transmission Tempered Glass
Frame	Anodized Aluminium Alloy Frame
Packing	30pcs per pallet, 390pcs per 20GP, 780pcs per 40HQ



Temperature Characteristics

Temperature Coefficient of Pmax	γ (Pm)	-0.36%/ °C
Temperature Coefficient of Voc	β (Voc)	-0.26%/ °C
Temperature Coefficient of Isc	α (Isc)	0.043%/ °C

I-V Curves

Current-Voltage Curve (BSM375M-60HPH)

